

扬州三菱电子有限公司
规格书

客户

型号

MDS200B

地址：江苏省扬州市南通西路 6 号

电话：0514-87344294

传真：0514-87310017

E— mail: SL you and me @ 163.com

<http://www.YZSLDZ.com>


MDS200B 技术资料

特点:

- 金属化三氧化二铝陶瓷绝缘,传热性好。
- 高温焊料焊接,有利于可靠性。

典型应用:

- 变频器
- 开关电源
- 电焊机

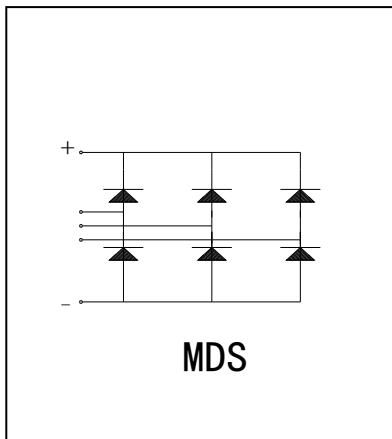

V_{RSM} (V)	V_{RRM} (V)	I_0 (AV)=200A (sin 180° Tc=100°C)
900	800	MDS200B-8
1300	1200	MDS200B-12
1700	1600	MDS200B-16
1900	1800	MDS200B-18
2100	2000	MDS200B-20
2500	2400	MDS200B-24

符号	测试条件	数值	单位
I_0 (AV)	Tc=100°C, 三相全波	200	A
I_{FSM}	Ta=25°C, 10ms, 0.6VRRM	2900	A
I^2t	Ta=25°C, 10ms	0.005×2900^2	A ² S
V_{FM}	$I_{FM}=200A, Ta=25°C$	1.10	V
V_{FO}	Tj=150°C	0.81	V
r_F	Tj=150°C	2.8	mΩ
I_{R1}	Ta=25°C, $V_R=V_{RSM}$	20	μA
I_{R2}	Ta=150°C, $V_R=V_{RRM}$	2	mA
Rjc		0.09	°C/W
Rcs		0.03	°C/W
Tstg		-40~+150	°C
Viso	Ac,50HZ,正弦波,1min	2500	V
Ms	散热器安装力矩	5	N•m
Mt	电极端子安装力矩	5	N•m

